




Ref 004 Single-Panel Light Box Type Canopy Cladding - Model H1350

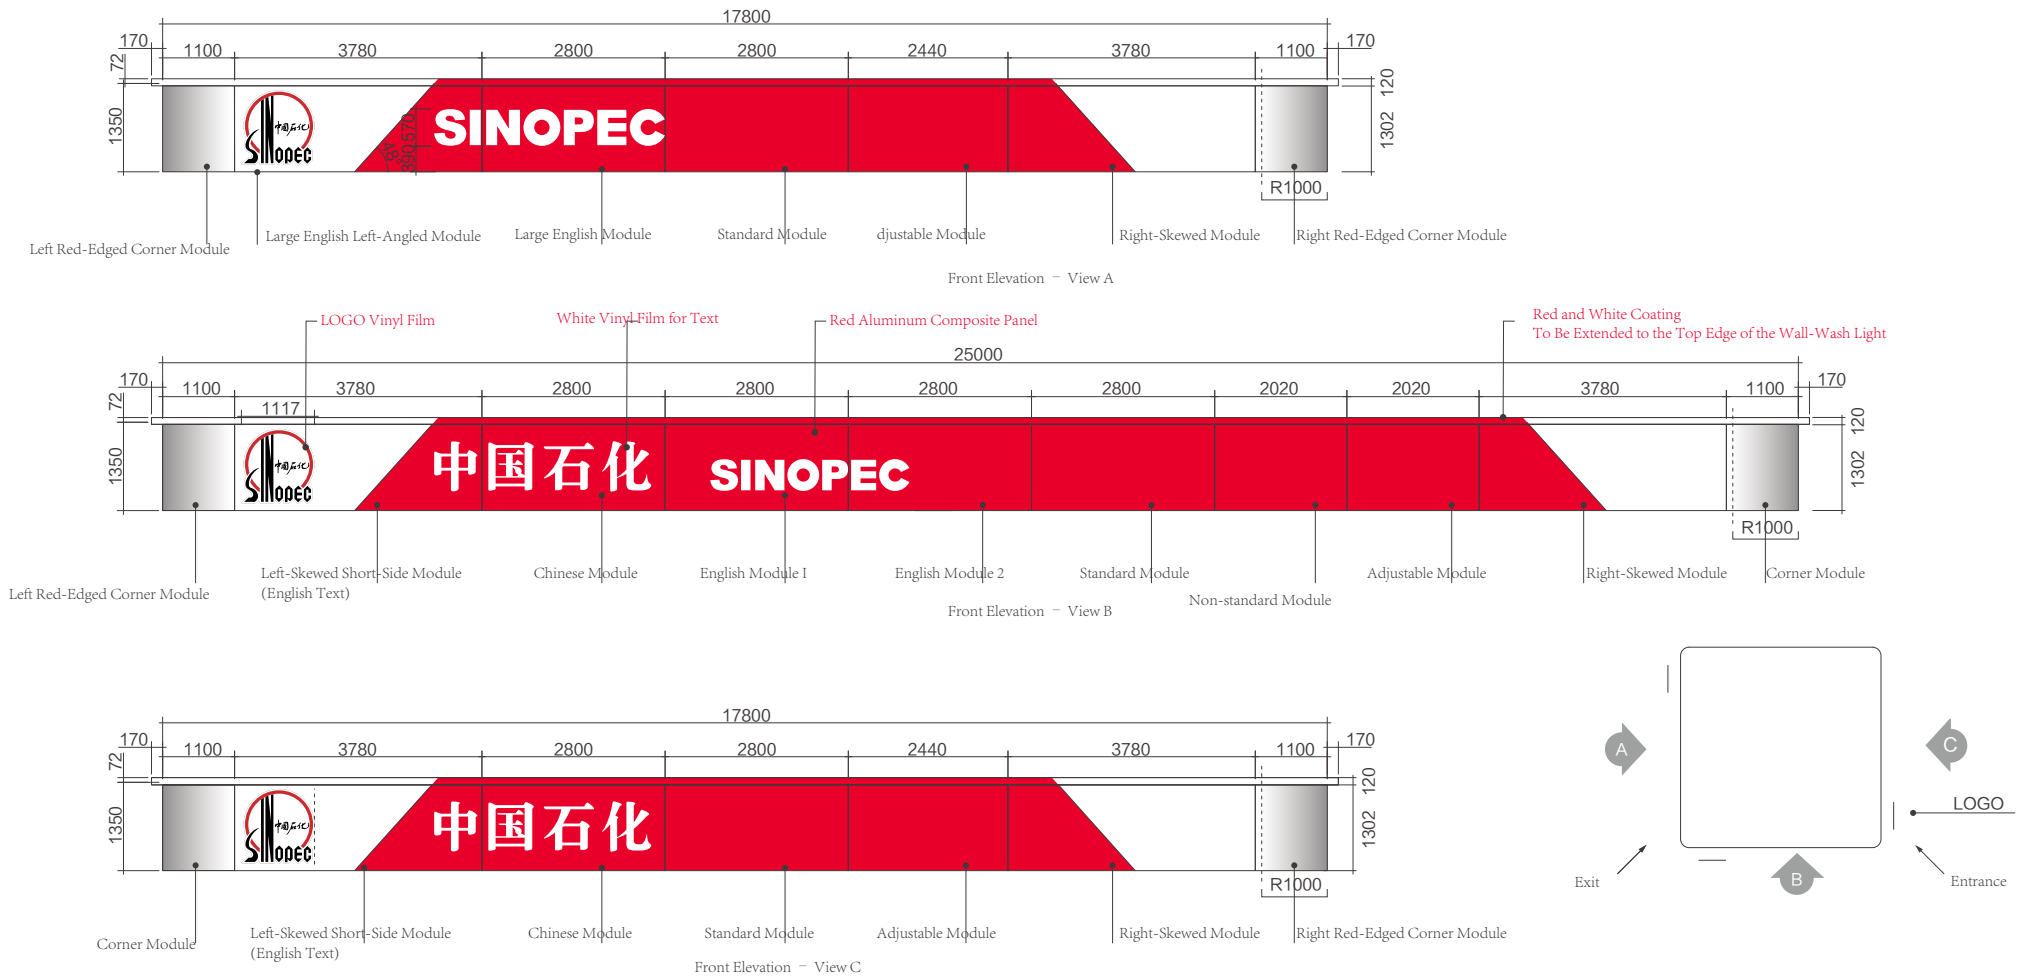

Ref-004

Single-Panel Light Box Type Canopy Cladding - Model H1350


Eaves Section View

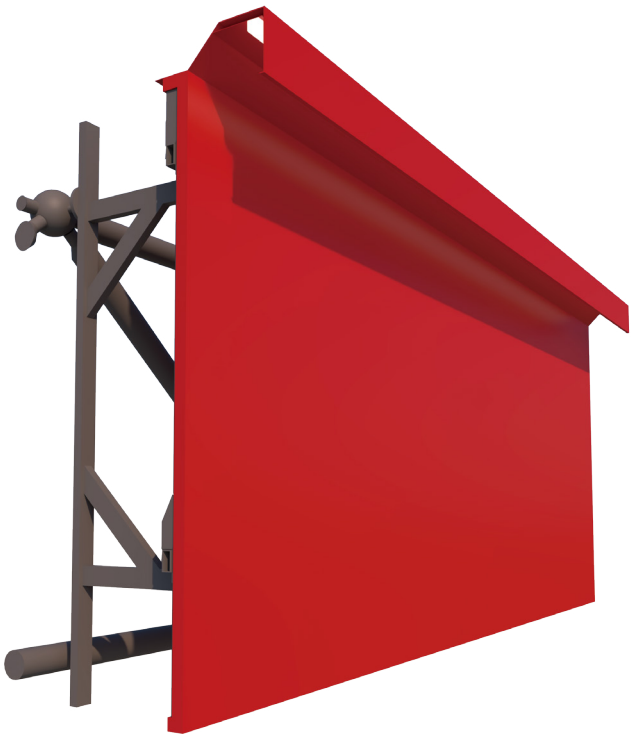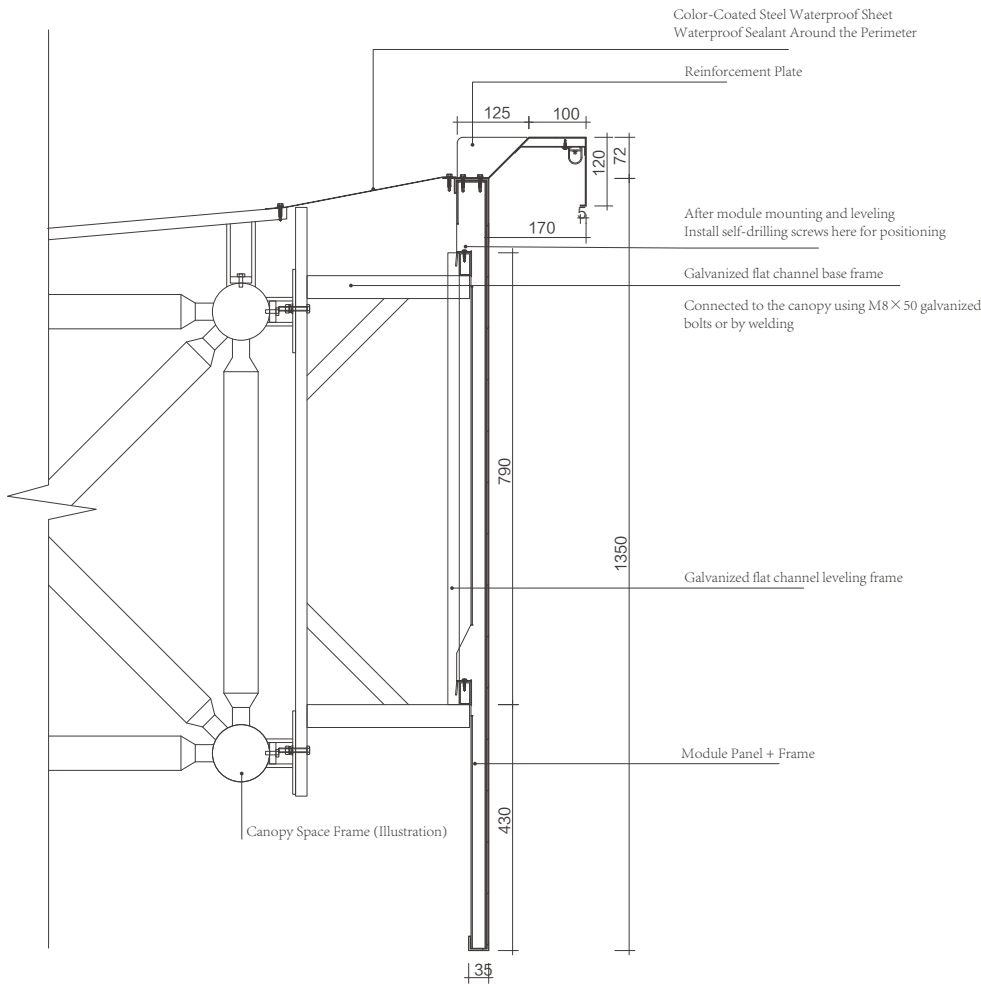

Customized Code: LK-2025-028

Ref-004 Single-Panel Light Box Type Canopy Cladding - Model H1350

White Corner Panel

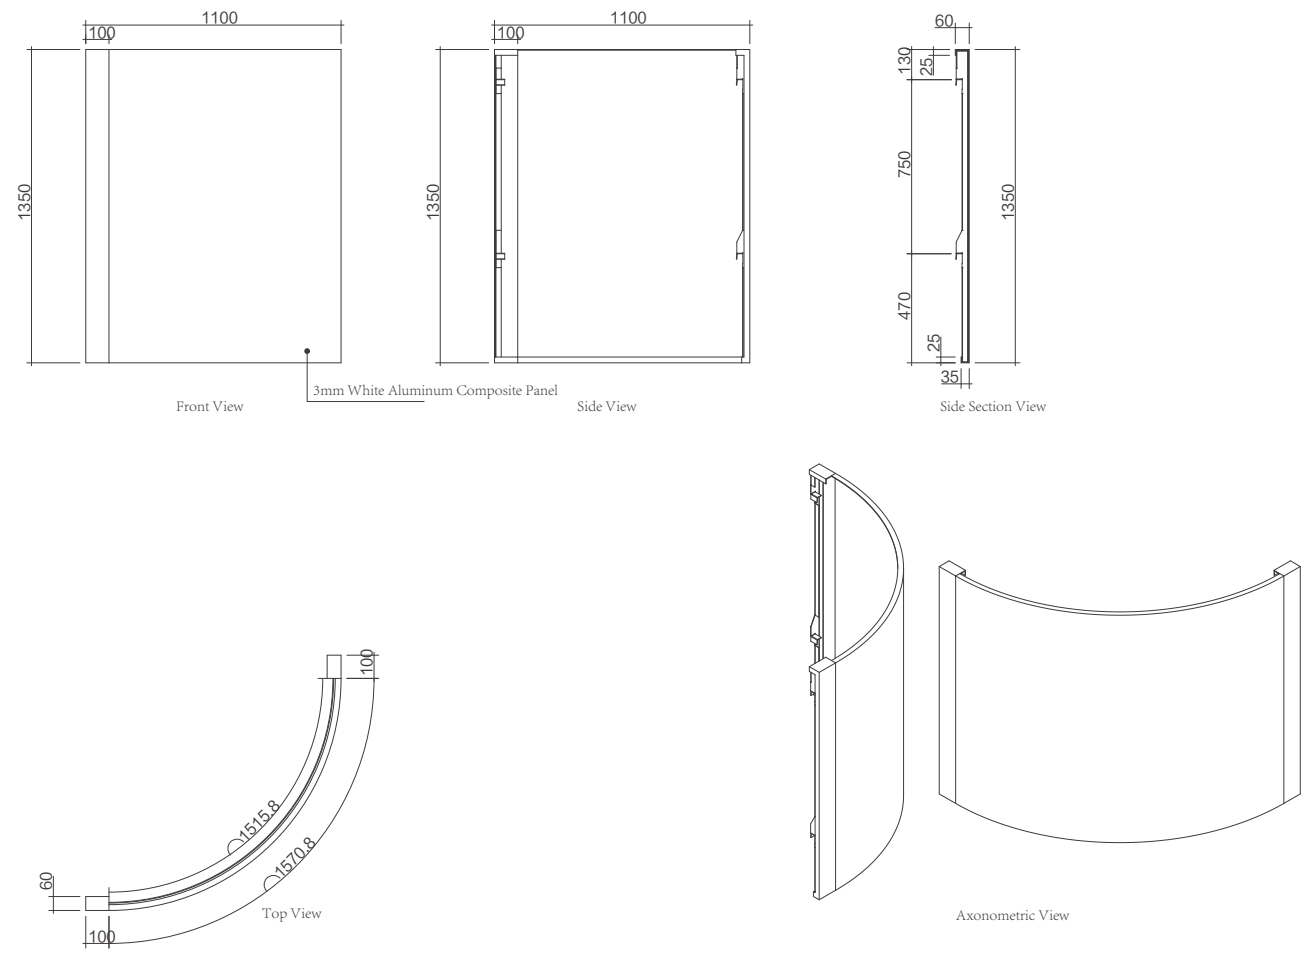


Note:
The modular panels shall be made of 3mm white aluminum composite panels (ACP), and the structural framework shall be made of 2mm galvanized steel sheets. In regions with severe corrosion conditions, 3mm aluminum sheets may be used as an alternative for the framework.

Customized Code: LK-2025-029

Ref-004 Single-Panel Light Box Type Canopy Cladding – Model H1350


Left-Skewed Module

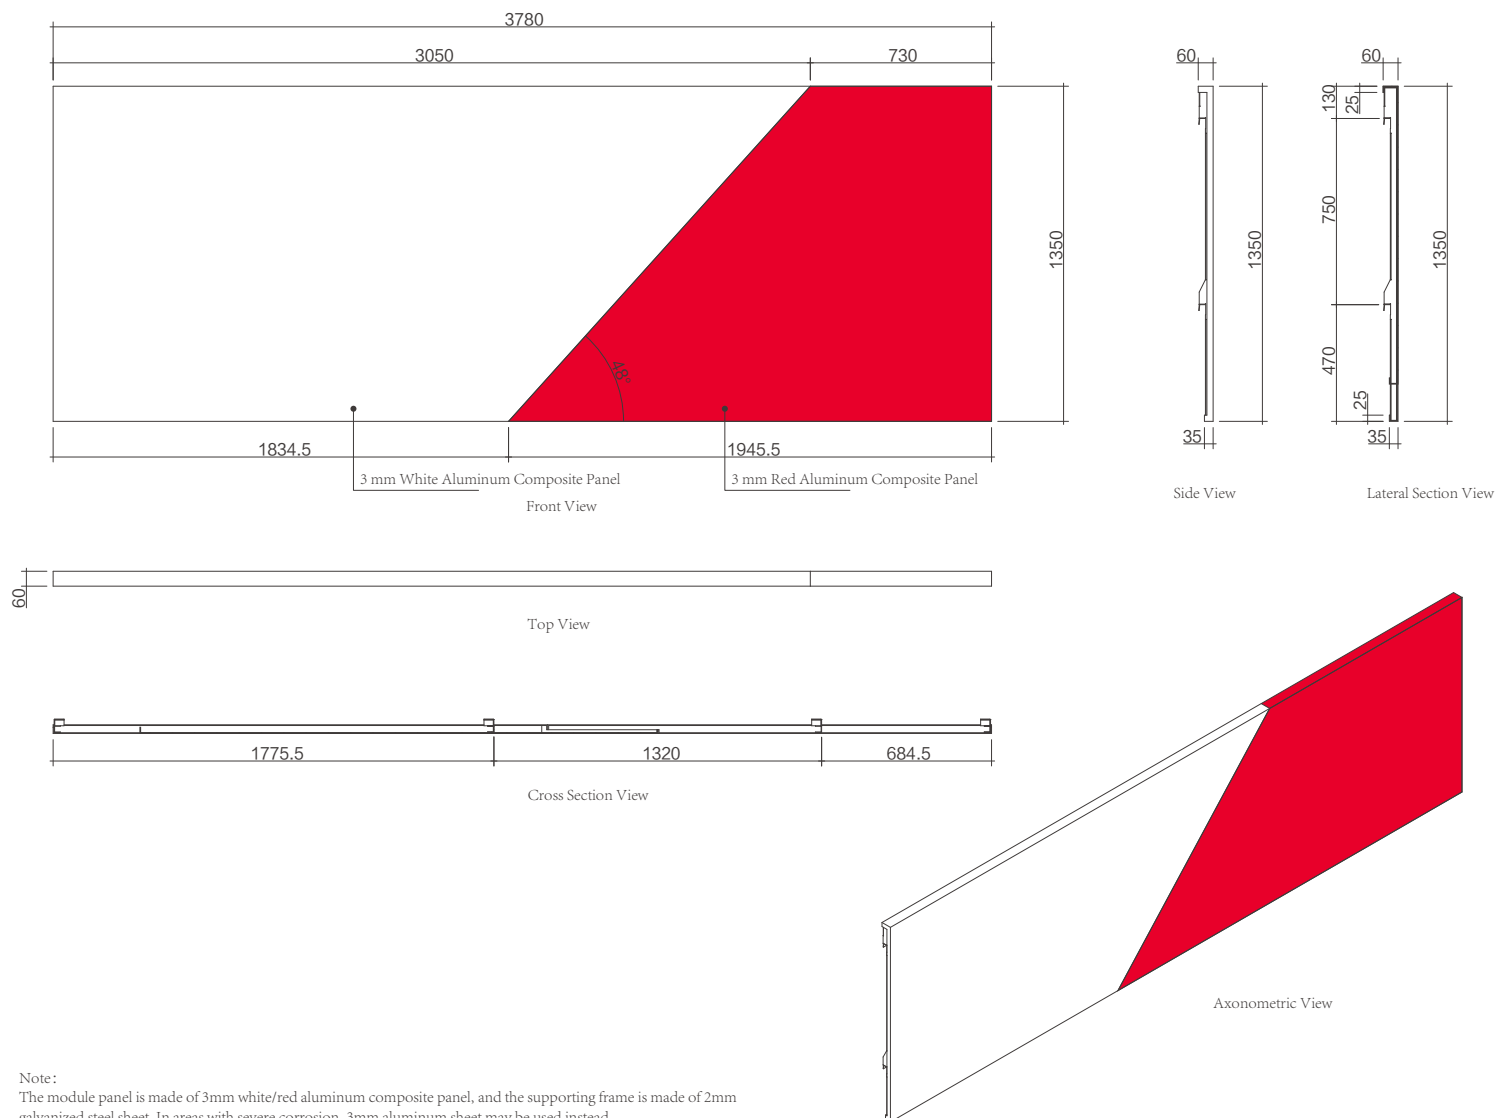

Customized Code: LK-2025-031

Ref-004 Single-Panel Light Box Type Canopy Cladding – Model H1350

Eave Standard Module – Red

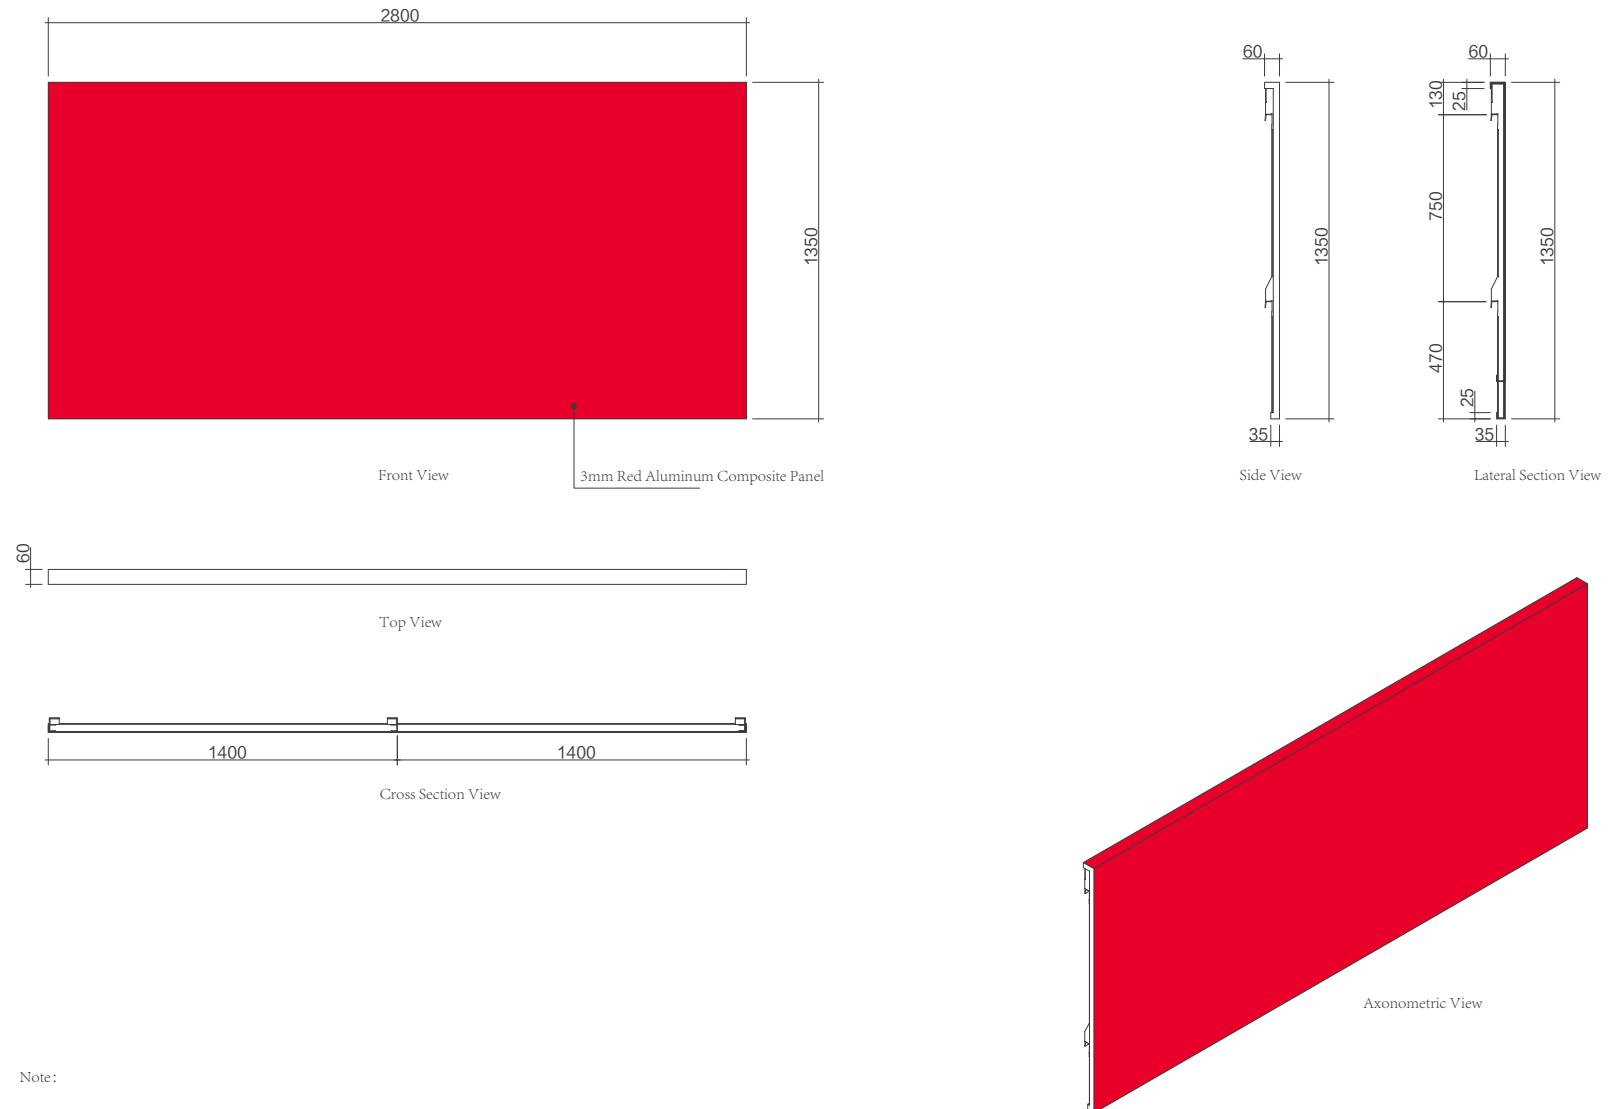


Note:


1. The module panel is made of 3mm white/red aluminum composite panel, and the supporting frame is made of 2mm galvanized steel sheet. In areas with severe corrosion, 3mm aluminum sheet may be used instead.。
2. The standard, Chinese, bilingual (Chinese-English), and English modules shall all be fabricated in accordance with this drawing. The surface film content shall follow the panel division diagram.

Ref-004 Single-Panel Light Box Type Canopy Cladding – Model H1350


Eave Corner Module with White Light Strip




Front View



Side View

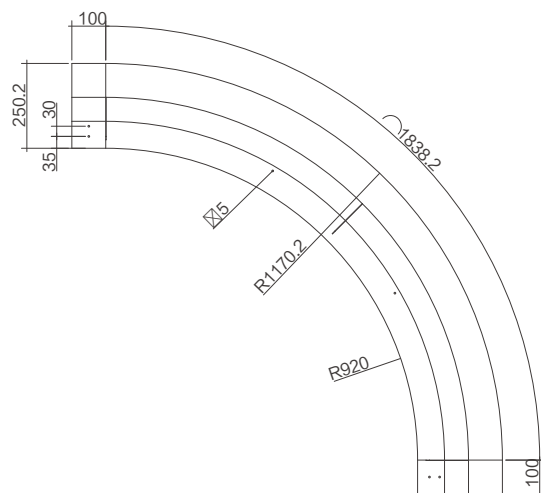


Top View



Enlarged Lateral Section View


The main body of the light strip is formed by welding 1.2mm galvanized steel sheets. White LED light tubes pre-installed in the factory.

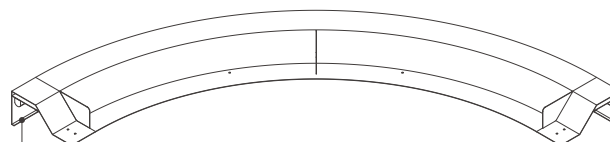

Axonometric View


Note:

1. The light strip panel is made of 1.2mm galvanized steel sheet, fully coated with white powder paint, and equipped with white LED light tubes pre-installed in the factory.

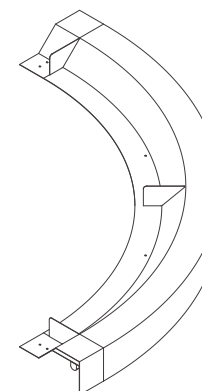

Ref-004 Single-Panel Light Box Type Canopy Cladding - Model H1350

Eave Corner Module with Red Light Strip

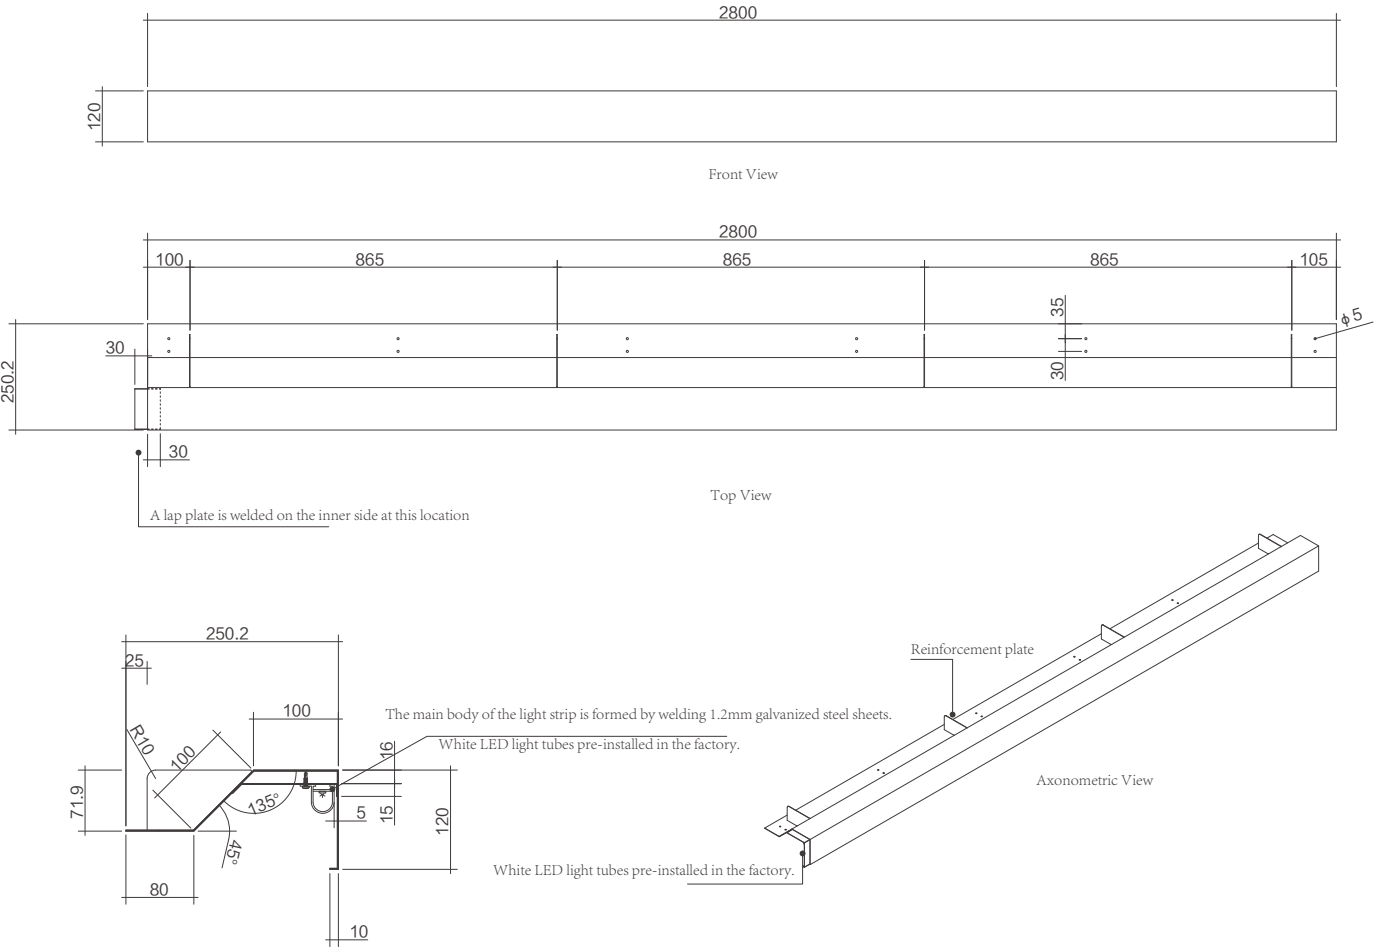

Note:
The light band panel is made of 1.2mm galvanized steel sheet, with the entire surface powder-coated in red, and white LED tubes installed in the factory.

1. Wall-washing lights shall be prefabricated tubes with a warranty of over 5 years and maintenance-free.
2. The spacing between light tube connections shall not exceed 10mm to ensure continuous illumination.
3. As a key visual element, the eave should produce a red light curtain effect:
 - For eaves with height \leq H1200, the vertical illumination brightness shall be 80 ± 6 cd/m², and bottom brightness > 4 cd/m²;
 - For eaves with height H1350, the vertical illumination brightness shall be 80 ± 5 cd/m², and bottom brightness > 3 cd/m².
4. The red light illumination on the ground surface shall be < 8 lx.
5. The canopy light at the bottom surface (drip line of the eave) shall have an illumination level > 100 lx for optimal performance.

	Product Name	Finished Modular Fascia Wall Washer Light
	Warranty Period	5 years overall (including light source & diffuser)
	Red Light Wavelength	620-625 nm
	Technical Specifications	<ul style="list-style-type: none">Red LED Chip: Luminous efficacy 50 lm/WLight Tube: Abrasion-resistant frosted PC extrusion tube, D30mmPower: 7~14W/mVoltage: 220V AC / 24~48V DCProtection Rating: IP67 or aboveOperating Environment: -30° C to 60° CBeam Angle: 25°